

MAXIMOTM

HARDWOOD




HARDWOOD DECK TILES – 24X24

Installation Guide

Whether indoors or out, over concrete or in the garden,
Maximo™ Hardwood Deck Tiles – 24x24 are ideal even for compact spaces.

Chosen for their warm, stylish look, these tiles let homeowners explore different patterns to suit any decor.
Made from Ipe, Cumaru, or Garapa, they're more durable than synthetic options and need minimal care.
They also allow excellent airflow, making them great for rooftops.


These instructions will guide the whole process of installing
Maximo™ Hardwood Deck Tiles – using quick connectors for easier and faster assembly.




DIY
FRIENDLY




EXTREME
DURABILITY



QUICK & EASY
INSTALLATION



SUSTAINABLY
SOURCED



PREMIUM
HARDWOOD

INSTALLATION INSTRUCTIONS


Deck tiles are designed to be installed directly on any solid, relatively level surface, including concrete, stone, brick, or even grass. Here's how to prepare different surfaces for installation:

- **Grass:** To install wooden deck tiles on grass, start by digging down about 2½ inches. Next, place a 1½-inch layer of gravel into the hole to create a stable base. Then, set the tiles into the gravel and gently hammer them flat to secure.
- **Concrete:** Wooden deck tiles can be laid directly on concrete surfaces. Use the included tile connectors to assemble your deck quickly and easily—no special tools required.
- **Gravel:** Ensure the gravel surface is level and compacted before placing the tiles for the best results.





1. Install the First Tile

Our Deck Tile comes pre-assembled in tiles. Using quick connectors, fit the Deck Tile into the continuous groove at each of the four corners. To set it up, position the quick connector with the notch facing outward at each corner, then snap them together, pressing until the Deck Tile is secure.

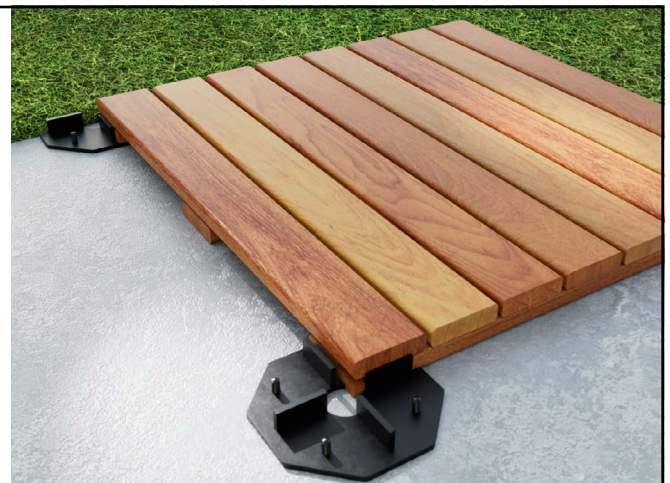

2. Install Additional Tiles

After placing the first tile, add the remaining tiles onto the quick connectors. The Deck Tile connector automatically maintains a consistent 3/8" gap, so you won't need to worry about uneven spacing.

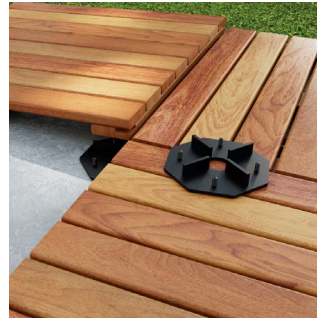
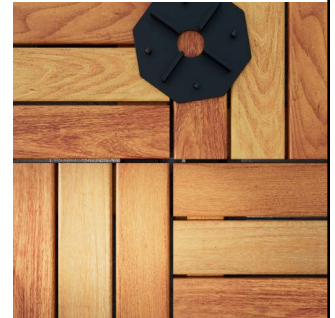


USING TILE CONNECTORS FOR EDGES OR CORNERS:

To use a connector on the edges or corners, score it along the pre-molded grooves using a utility knife, which marks the edges of the built-in spacers. Bend the connector downward until it snaps in half. You can repeat this step to create quarter sections for use at the corners of your Maximo™ Hardwood Deck Tiles – 24x24.

Note: Both halves or quartered sections of the quick connector can be used on either hidden or exposed edges. The side with the spacer can also be used to create a gap between your deck and nearby structures like a house, fence, or wall.

Work smart and work safe. Always cut in the direction away from your body and hands.

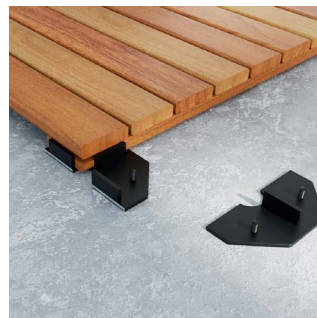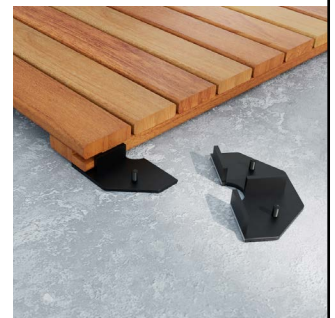

CUTTING DECK TILE


1. Size and shape adjust by cutting

Maximo™ Hardwood Deck Tiles – 24x24 are highly dense, so it's best to use a slower feed rate when cutting and to use carbide saw blades. If there are screws along the cutting path, be sure to remove them beforehand. To help prevent checking or minor cracks, it's a good idea to seal any cut edges using a suitable glue or end sealer meant for exterior wood. Use a foam brush to apply the sealer to the cut edges only. Caution: Avoid getting sealer on the top surface of the wood, as it may create an unwanted glossy discoloration.



2. Reinstallation

To reassemble Maximo™ Hardwood Deck Tiles – 24x24 after cutting, carefully remove the bottom runner from the section to be discarded, taking care not to damage the screw heads. Use the removed runner to align the holes and pre-drill corresponding holes in the piece that will be installed, using a carbide drill bit. Be cautious not to drill through the top surface. To control depth, you can wrap tape around the drill bit. Ensure consistent spacing between the planks as you drill. Once pre-drilled, attach the runner to the installation piece, reusing screws whenever possible. Do not use iron screws, as they can cause discoloration over time, and avoid galvanized fasteners.

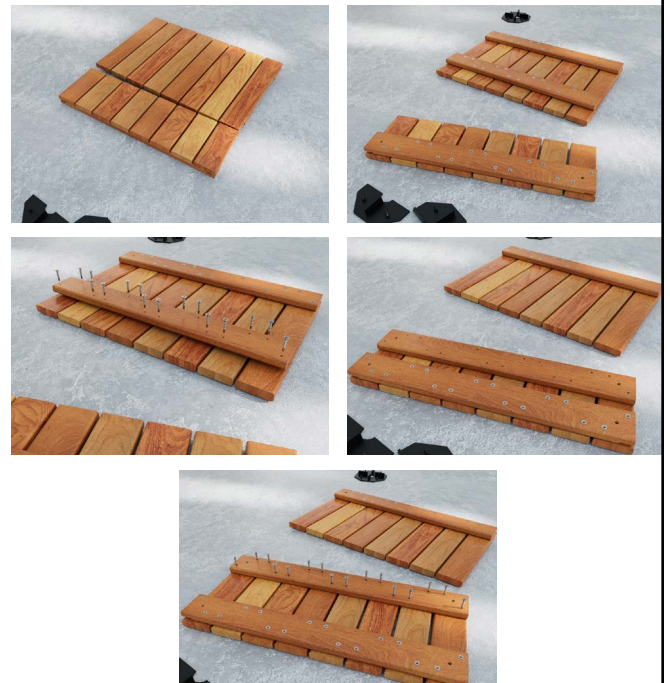

AVAILABLE MAXIMO™ HARDWOOD DECK TILES – 24X24 SPECIES

Discover the elegance and long-lasting strength of premium hardwood species with Maximo™ Hardwood Deck Tiles – 24x24.



**Ipe
Hardwood**



**Garapa
Hardwood**



**Cumaru
Hardwood**



Recommended Accessories:

- US4 Deck Tile Pedestal
- US4 Deck Tile Connector



Finish & Texture:

Maximo Deck Tiles feature a smooth deck board surface, engineered for natural slip resistance and a clean, uniform appearance.